



Corp. Office:

202, Dev Arc, Opp. Iskon Temple, S.G. Highway, Ahmedabad 380 015.

Gujarat, INDIA.

Ph.: +91 79 6612 5541 /, Fax: +91 79 6612 5600 Email: contact@bonzer7.com, info@bonzer7.com

www.bonzer7.com

Toll Free No. 1800 123 4475







Make elegance YOUR AMBIANCE

About Us

With our unvarying focus towards creating a comprehensive collection of formidable products and exceptional service, we have fastly become one of the front-runners in the ceramic space. We aspire to use our expertise and ardor to turn your dreams into reality.

We are always striving to upgrade our technology to manufacture superior products. At Bonzer7, we follow the adage 'Inspired By You'. It is a priority for us to meet the expectations of our customers fittingly. Our efforts are directed towards providing our customers new designs with unmatched quality.

A testament to our 'customer first approach' is our happy customers. We have become the preferred brand of country's prime architects, interior designers, custom home builders, developers and astute homeowners in a short span of time.









QUALITY THAT IS STAMPED BY AUTHORITIES **OUR CERTIFICATIONS AND ACCREDITATIONS**

Bonzer7 has prioritized quality in all its endeavors and the same has been recognized by authorities. We have received certain certifications that boast our adherence to market standards and established procedures. We are also the proud recipients of 'Power Brands Rising Star' - a recognition bestowed upon us by Indian customers.







Glossy tiles have shiny surfaces and have an enamel coating that reflects light. Glossy Tiles are ideal for small areas, as they make any area look brighter and more spacious. ... These tiles are available in 800x800mm, 600x600mm & 400x400mm.

Matt finish tiles are perfect for imparting a traditional look to any space. Matt finish tiles are a preferred material for outdoor applications due to their anti-slip feature and durability.



Digital

Wall Tiles



Floor Tiles

Correct

Rectified










Glossy













Domestic



800x800mm | GLOSSY








ULTRA YELLOW







BRANCOS WHITE

Winto Collection






















Venezia Plus Collection

SHINE GREY



Venezia Collection

VELVET WHITE



SHINE WHITE

SHINE YELLOW

Venezia Collection









SHINE FIRE



VELVET YELLOW Venezia Collection

VELVET BROWN Venezia Plus Collection









VELVET GREY

Venezia Plus Collection





Venezia Plus Collection VELVET FIRE


SHINE FUSION Venezia Plus Collection

Venezia Plus Collection SHINE BLACK







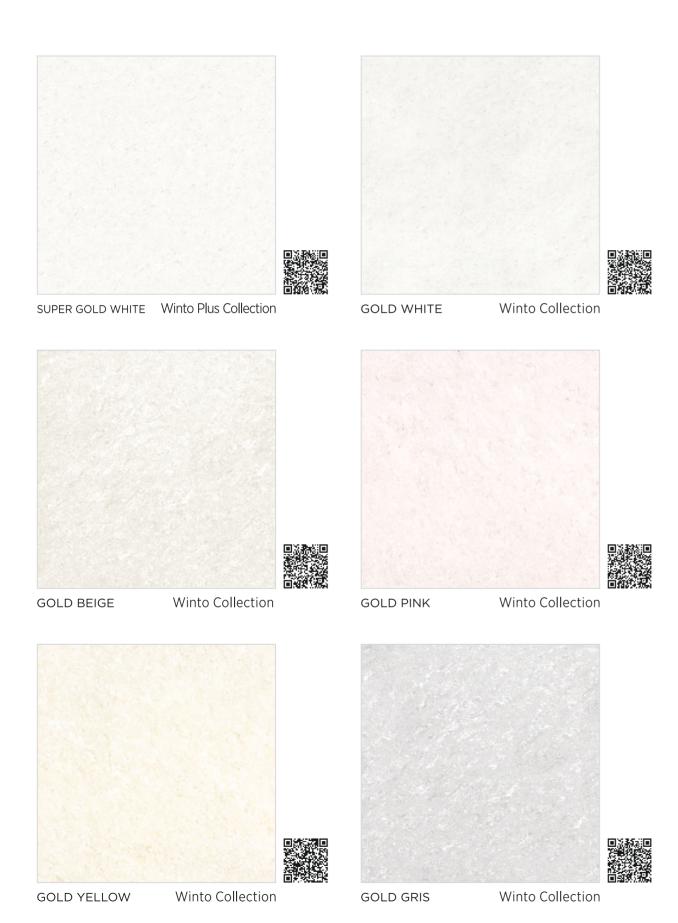



08

GOLD BROWN

Venezia Collection
















MAGIC ASTRAL

NAN® TECH SOLUBLE SALT

MAGIC CLOUDY

MAGIC WOODEX

MAGIC ROYAL CREMA









MAGIC FEATHER


MAGIC MARBELLA

MAGIC ATHENS

MAGIC MOGANO











MAGIC CAPRI

MAGIC ASTON

MAGIC CRETA





















































































DEVIN BROWN



BRINZO GREY




BLING BLACK



BLING BROWN




FLUX TEAK WOOD



CORIA CREMA




CORIA BROWN



ABRIL NERO



ELISE BIANCO



ELISE GREY DECOR



ELISE GREY




PROVENZA BROWN



PROVENZA GRIS



RANGER NERO




LOGAN BIANCO




LOGAN GREY DECOR



LOGAN GREY



TREVER GRIS




TREVER BROWN



FENESTA CREMA



BURNET BROWN



COSTA BROWN



CRUZAR BLUE





<u> 19</u>


















PETRA CREMA


PETRA NERO















































LITORAL BROWN









LITORAL BIANCO

20

ARROW STONE BROWN















































SAND STONE GREY

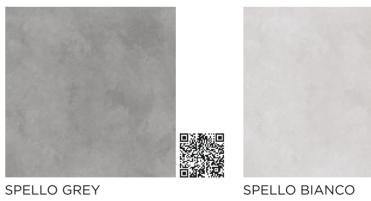









SAND STONE BIANCO

SAND STONE BEIGE



25

СНА	RACTERISTICS				
DIME	ENSION & SURFACE QUALITY	Requirement as per ISO 13006:2012 Gr Bla Eb≤0.5%	Requirement as per IS 15622:2017 Gr Bla E≤0.08%	BONZER7 Value	Test Method
: =	Deviation In Length & Width	± 0.6%	± 0.1%	± 0.1%	ISO 10545 Part- IS 13630 Part-1
•	Deviation In Thickness	± 5.0%	± 5.0%	± 3.0%	ISO 10545 Part IS 13630 Part-1
	Straightness of Edge	± 0.5%	± 0.1%	± 0.1%	ISO 10545 Part- IS 13630 Part-1
Ĭ	Rectangularity	± 0.5%	± 0.1%	± 0.1%	ISO 10545 Part IS 13630 Part-1
> −€	Surface Flatness	± 0.5%	± 0.5%	± 0.2%	ISO 10545 Part IS 13630 Part-1
% .	Water Absorption % By Wt.	≤ 0.5, Ind 0.6 Max.	≤ 0.08, Ind. 0.1 Max.	≤ 0.05%	ISO 10545 Part IS 13630 Part-2
★	Flexural Strength (MOR) In N/mm ²	Avr.35, Ind. Min. 32	Avr.35, Ind. Min. 32	≥40 N/mm²	ISO 10545 Part IS 13630 Part-6
ş	Breaking Strength in N	1300 N Min.	1300 N Min.	> 2000 N	ISO 10545 Part IS 13630 Part-
Ů	Bulk Density (gm/cc)	2.0 Min.	2.2 Min.	≥ 2.2	ISO 10545 Part IS 13630 Part-2
<u> </u>	Impact Resistance	> 0.40	> 0.55	> 0.55	ISO 10545 Part IS 13630 Part-
0	Resistance to Deep Abrasion	175mm³ Max.	140mm³ Max.	≤120mm³	ISO 10545 Part IS 13630 Part-
***	Thermal Shock Resistance	10 cycle Min.	10 cycle Min.	No Damage after 10 cycles	ISO 10545 Part IS 13630 Part-
6 *	Moisture Expansion in mm/M	Test Method Available	0.02 Max.	Nil	ISO 10545 Part IS 13630 Part-
*	Frost Resistance	Resistance	Resistance	Resistance	ISO 10545 Part IS 13630 Part-
*	Moh'S Scratch Hardness	Min. 5	Min. 5	Min. 5	EN 101 IS 13630 Part-
S	Resistance To House hold Chemicals	No Damage	Min Class AA	Class AA	ISO 10545 Part-
N	Resistance To Acids & Alkalis (Except HF Acid)	No Damage	Min Class AA	Class AA	ISO 10545 Part-
L	Stain Resistance	Min Class 3	Min Class 1	Resistance	ISO 10545 Part

MULTICHARGE PACKING DETAILS:

Size. (MM)	Thickness	Weight (Kg.)	No. Of Tiles/set	Area Sq.mtr/box
800x800mm	8.2 mm	36	3	1.92m²
600x600mm	7.7 to 8.00	24.5 to 25	4	1.44m²

SOLUBLE SALT PACKING DETAILS:

Size. (MM)	Thickness	Weight (Kg.)	No. Of Tiles/set	Area Sq.mtr/box		
600x600mm	7.4	22.50	4	1.44m²		

- *Notes:

 All technical specifications in this catalogue are for premium grade material only.

 SHADE/SIZE VARIATIONS are inherent characteristics of ceramics. Certain products purposely have variations which are part of design & process. The same have been indicated.

 It is recommended to blend tiles by mixing tiles from various boxes & check for natural hue before fixing the tiles.

 It is recommended to check the tiles before laying/fixing. Quality standards cover only 1st/premium quality only.

 Company's liability is limited to material that has not been laid.

 NO COMPLIANT SHALL BE ENTERTAINED ON TILES ALREADY FIXED/LAID.

- The liability is also limited to the material supplied by the company; no other claim is entertained under at
 No complaint is entertained on decoration done on tiles, other than the ones done by BONZER 7 TILES

GENERAL NOTE: ANY COMPLAINT MUST BE BROUGHT TO THE COMPANY'S NOTICE WITHIN 10 DAYS OF PURCHASE & BEFORE FIXING OF TILES.

How to avoid defects & complaints :

· Use good quality Tiles

24

- Choose good quality Tiles, with proper consideration to area intended of usage.

- Avoid careless laying of Tiles
 Avoid poor maintenance-for instance, by cleaning with strong chemicals or with abrasive equipment e.g. metallic scrubber
- Always keep Tiled area clean & ensure dusting/mopping regularly
 Put Doormats/Foot-mats at all strategic locations to avoid loose
- debris/dust from entering the Tiled area

APPLICATION

















DISCLAIMER: Bonzer 7 Tiles reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors. All complaints need to be reported within 10 days of purchase. Always follow instructions to avoid complaint due to bad masonry.

CHARACTERISTICS						
(A) DIMENSION & SURFACE QUALITY	Requirement as per ISO 13006:2012 Gr Bla Eb≤0.5%	Requirement as per IS 15622:2017 Gr Blb 0.08% ≤E<3.0%	BONZER7 Value	Test Method		
i ≡ Deviation In Length & Width	± 0.6%	± 0.1%	± 0.1%	ISO 10545 Part-2 IS 13630 Part-1		
P Deviation In Thickness	± 5.0%	± 5.0%	± 3.0%	ISO 10545 Part-2 IS 13630 Part-1		
Straightness of Edge	± 0.5%	± 0.1%	± 0.1%	ISO 10545 Part-2 IS 13630 Part-1		
■ Rectangularity	± 0.5%	± 0.1%	± 0.1%	ISO 10545 Part-2 IS 13630 Part-1		
→ Surface Flatness	± 0.5%	± 0.5%	± 0.2%	ISO 10545 Part-2 IS 13630 Part-1		
Water Absorption % By Wt.	≤ 0.5, Ind 0.6 Max.	0.08%≤E≤3.0, Ind 3.3 Max.	≤ 0.5	ISO 10545 Part-3 IS 13630 Part-2		
→ Flexural Strength (MOR) In N/mm²	Avr.30, Ind. Min. 27	Avr.30, Ind. Min. 27	≥35 N/mm²	ISO 10545 Part-4 IS 13630 Part-6		
Breaking Strength in N	1300 N Min.	1100 N Min.	> 1800 N	ISO 10545 Part-4 IS 13630 Part-6		
Resistance to Surface Abrasion	Manufacturer to State Class	PEI II Min	Min.PEI IV	ISO 10545 Part-7 IS 13630 Part-11		
Thermal Shock Resistance	10 cycle Min.	10 cycle Min.	No Damage after 10 cycles	ISO 10545 Part-9 IS 13630 Part-5		
Moisture Expansion in mm/M	Test Method Available	0.02 Max.	Nil	ISO 10545 Part-10 IS 13630 Part-3		
Crazing Resistance	Required	4 Cycle at 7.5 bar Min.	Resistance	ISO 10545 Part-11 IS 13630 Part-9		
Frost Resistance	Resistance	Resistance	Resistance	ISO 10545 Part-12 IS 13630 Part-10		
Moh'S Scratch Hardness	Min. 5	Min. 5	Min. 7	EN 101 IS 13630 Part-13		
Resistance To House hold Chemicals	No Damage	Min Class AA	Class AA	ISO 10545 Part-13 IS 13630 Part-8		
Resistance To Acids & Alkalis (Except HF Acid)	No Damage	Min Class AA	Class AA	ISO 10545 Part-13 IS 13630 Part-8		
La Stain Resistance	Min Class 3	Min Class 1	Class 1	ISO 10545 Part-14 IS 13630 Part-8		

PACKING DETAILS:

Size. (MM)	Thickness	Weight (Kg.)	No. Of Tiles/set	Area Sq.mtr/box
400x400mm	10.8 TO 11.2 mm	18.7 Kg.	5 Pcs	0.80 M ²

- All technical specifications in this catalogue are for premium grade material only.
 SHADE/SIZE VARIATIONS are inherent characteristics of ceramics. Certain products purposely have variations which are part of
- SHADE/SIZE VARIATIONS are inherent characteristics of ceramics. Certain products purposely have variations design & process. The same have been indicated.
 It is recommended to blend tiles by mixing tiles from various boxes & check for natural hue before fixing the tiles.
 It is recommended to check the tiles before laying/fixing. Quality standards cover only 1st/premium quality only.
 Company's liability is limited to material that has not been laid.
 NO COMPLIANT SHALL BE ENTERTAINED ON TILES ALREADY FIXED/LAID.

- The liability is also limited to the material supplied by the company; no other claim is entertained under any circumstances.
 No complaint is entertained on decoration done on tiles, other than the ones done by BONZER 7 TILES
- GENERAL NOTE: ANY COMPLAINT MUST BE BROUGHT TO THE COMPANY'S NOTICE WITHIN 10 DAYS OF PURCHASE & BEFORE FIXING OF TILES.

How to avoid defects & complaints :

- · Use good quality Tiles
- Choose good quality Tiles, with proper consideration to area intended of usage.
- Avoid careless laying of Tiles
- Avoid poor maintenance-for instance, by cleaning with strong
- chemicals or with abrasive equipment e.g. metallic scrubber

 Always keep Tiled area clean & ensure dusting/mopping regularly
- Put Doormats/Foot-mats at all strategic locations to avoid loose
- debris/dust from entering the Tiled area

DISCLAIMER: Bonzer 7 Tiles reserves the right to delete & amend either totally or partially, any of the colors, shapes, sizes, references and other technical specifications contained in this catalogue at anytime. The colors shown of tiles in this catalogue are purely illustrative and limited to printing process. Please refer actual sample before final selection. The details of sizes, colors, references should be verified for typographical errors. All complaints need to be reported within 10 days of

purchase. Always follow instructions to avoid complaint due to bad masonry.